
P6000s 400V 50Hz #CONN #DPP



Power Rating		
Maximum power MAX	kVA	6.3
Maximum power MAX	kW	5.0
Continuous power COP	kVA	5.7
Continuous power COP	kW	4.6
Frequency	Hz	50
Voltage	V	400/230
Power factor	cos ϕ	0.8
Phase		3
Fuel		Diesel



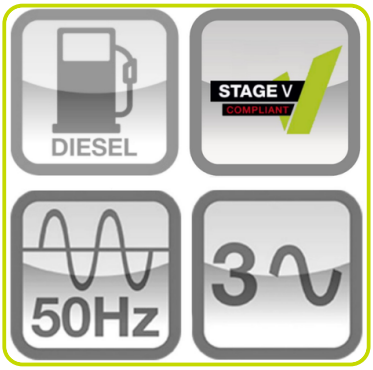

Ratings definition (ISO-8528-1)
MAX - Maximum Power:
It is defined as the power given by multiplying the current and voltage that the generating set is capable of delivering for at least 5 min. Prescribed output voltage shall be within ±10 % of the rated voltage and prescribed output frequency shall be within ±8 % of the rated frequency.
COP - Continuous Power:
It is defined as being the maximum power which the generating set is capable of delivering continuously while supplying a constant electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer.

Gensets are compliant with EC mark which includes the following directives and standards and subsequent modification and intregation:
• 2006/42/CE Machinery safety
• 2014/30/UE Electromagnetic compatibility
• 2014/35/UE electrical equipment designed for use within certain voltage limits
• 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC) – If applicable
• 97/68/EC Emissions of gaseous and particulate pollutants. (amended by 2016/1628 EC) – If applicable
• ISO 8528 as applicable
• 2011/65 ROHS
• EN 12100, EN 13857, EN 60204 as referred into the ISO8528-13
Company with quality certification ISO 9001

www.pramac.com

Engine specifications		
Engine Brand		Yanmar
Model		L100V Electric
[50Hz] Exhaust emission level		Stage V
Engine cooling system		Air
Displacement	cm³	435
Aspiration		Natural
Operating Speed-Nominal	rpm	3000
Speed governor		Mechanical
Fuel		Diesel
Oil capacity	l	1.6
Starting system		Electric
Electric circuit	V	12



Alternator Specifications		
Alternator		Mecc Alte
Class		H
IP protection		23
Poles		2
Frequency	Hz	50
Voltage	V	400
Voltage regulation system		Compound
Voltage tolerance	%	5

Dimensional data		
Length	(L) mm	970
Width	(W) mm	580
Height	(H) mm	927
Weight	kg	203



Fuel Tank - Autonomy		
Fuel tank capacity	l	19
Fuel consumption @ 75% COP	l/h	1.30
Fuel consumption @ 100% COP	l/h	1.73
Running time @ 75% COP	h	14.62
Running time @ 100% COP	h	10.98



Noise level		
Guaranteed noise level (LWA)	dB(A)	84
Noise pressure level @ 1 m	dB(A)	69
Noise pressure level @ 7 m	dB(A)	56



Electrical Data		
Battery Voltage	V	12
Battery capacity	Ah	45
Battery	n	1



www.pramac.com

Genset equipment

ENCLOSURE:
- Weatherproof enclosure made of galvanized sheet metal.
- Superior noise attenuation thanks to high quality soundproofing material.
- Highly efficient residential silencer integrated inside the canopy.
- External fuel filling point for simple and quick refueling operation.
- Single lifting point for effortless handling.
- Hinged canopy design allows full access to all internal components.



BASE FRAME AND TANK:
- Base frame designed for easy fork handling.
- High capacity integrated fuel tank for extended run-time.
- Fuel level sensor.
- Sturdy supporting frame between engine-alternator and canopy.
- Properly sized anti-vibration mounts.



ENGINE EQUIPPED WITH:
- Battery
- Liquids (No Fuel)
- Lube oil pressure sensor




GENSET CONTROL PANEL

COMMANDS
- Start selector switch with key: OFF - ON - START
- **CONN**ector for RSS/AMF panel (accessories available)

INSTRUMENTATION (Analogic)
- Voltmeter

PROTECTIONS
- Circuit breaker
- Differential protection (**DPP**)
- Engine Protection unit: High engine temperature; Low oil pressure; Low Fuel Level; Battery Charger alternator failure.

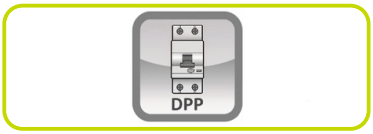

SOCKET TYPE

SCHUKO 230V 16A IP54	1
2P+T CEE 230V 16A IP44	1
3P+N+T CEE 400V 16A IP44	1



ACCESSORIES

Automatic Main Failure	AMF
Remote Start/Stop Wireless	RSS
Wheel kit	WKS



The information is aligned with the Data file at the time of download.
Printed on 17/08/2026 (ID 208066)

©2026 | PR Industrial S.r.l. – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc.| All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

www.pramac.com